

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: CP electronics GmbH

Supplier's address: EPREL, Oststrasse 69 32051 Herford Deutschland

Model identifier: SW1-Touch 4000K

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	no		
Mains or non-mains:	NMLS	Connected light source (CLS):	Nein
Colour-tuneable light source:	Nein	Envelope:	-
High luminance light source:	Nein		
Anti-glare shield:	Nein	Dimmable:	No


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	1	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	109 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2800...4200
On-mode power (P_{on}), expressed in W	0,7	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,379 0,368
Parameters for directional light sources:			
Peak luminous intensity (cd)	22	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:			
R9 colour rendering index value	6	Survival factor	0,98
the lumen maintenance factor	0,96		

(a): not applicable;

(b): not applicable;

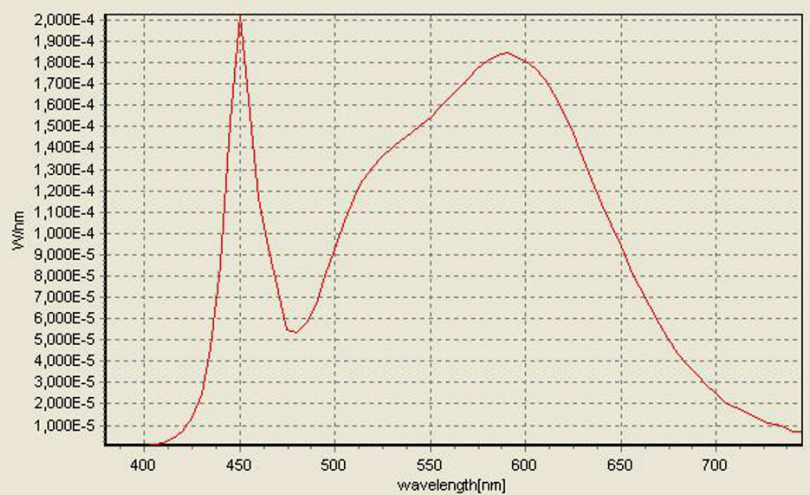

Graph Mode
 2D
 CIE xy
 CIE u' v'

display data
 numeric
 graphic

scan

scale

peak wavelength [nm]

 peak level [W/nm]

Phi [lm]

meas time [ms]

Cursor

snapshot file: E:\cp\Goos\EPREL\STOP9 Quadrat CP151119

measurement device: BTS256, serialnumber: 9132
 selected Configuration
 BTS Total Flux
 a(z) mode
 narrow band correction
 online correction
 scan range [nm]
 d

detector	ena
VLambda	X

Power Supply: no LPS