



NO.1121121019

检测报告

Test Report

样品名称： 锂离子聚合物电池 Li3949T44P8h806459 3.89V
4900mAh/19.06Wh (Rat) 5000mAh/19.45Wh (typ)

Name of Sample: RECHARGEABLE LI-ION POLYMER BATTERY
Li3949T44P8h806459 3.89V 4900mAh/19.06Wh (Rat)
5000mAh/19.45Wh (typ)

委托单位： 珠海冠宇电池股份有限公司

Consignor: Zhuhai CosMX Battery Co., Ltd.



上海化工院检测有限公司

Shanghai Institute of Chemical Industry Testing Co., Ltd.

上海化工院检测有限公司 检测报告

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report

NO. 1121121019

1/3

样品名称 Name of Sample	中文 Chinese	锂离子聚合物电池 Li3949T44P8h806459 3.89V 4900mAh/19.06Wh(Rat) 5000mAh/19.45Wh(typ)	
	英文 English	RECHARGEABLE LI-ION POLYMER BATTERY Li3949T44P8h806459 3.89V 4900mAh/19.06Wh(Rat) 5000mAh/19.45Wh(typ)	
样品编号 Sample No.	1121121019		
委托单位 Consignor	珠海冠宇电池股份有限公司 Zhuhai CosMX Battery Co., Ltd.		
生产单位 Manufacturer	珠海冠宇电池股份有限公司 Zhuhai CosMX Battery Co., Ltd.		
检测方法 Test method	联合国《关于危险货物运输的建议书 规章范本》 ST/SG/AC.10/1/Rev.21 3.3章 特殊规定 188条款。 UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS" Model Regulations ST/SG/AC.10/1/Rev.21 3.3 special provisions 188		
判定标准 Criterion	联合国《关于危险货物运输的建议书 规章范本》 ST/SG/AC.10/1/Rev.21 3.3章 特殊规定 188条款。 UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS" Model Regulations ST/SG/AC.10/1/Rev.21 3.3 special provisions 188		
样品外观 Appearance	长方形瓦楞纸箱(400mm×305mm×155mm), 内装117个锂电池。 Rectangle corrugated carton(400mm×305mm×155mm), containing 117 lithium batteries.		
样品接受日期 Accepted Date	2021-12-30	检测起造日期 Test Date	2021-12-30 ~ 2021-12-30
检测项目 Test Items	1. 2m跌落试验 1. 2m Drop test		
检测结论 Conclusion	被测试包装件能够承受1.2m跌落试验。 The tested package is capable of withstanding a 1.2 m drop test.		
备注 Comment	生效日期(Date): 2021-12-31 内包装: 塑料托盘。Inner package: plastic tray. 包装件毛重(kg): 9.6 锂电池净重(kg): 7.9		
委托单位地址 Consignor Address	/		邮政编码 Post Code 519040

批准
Approver:
职务
Title:

王宗


副总工程师(Vice chief engineer)

审核
Checker:

许莹

编制
Compiler:

傅强



上海化工院检测有限公司
检测报告

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report

NO. 1121121019

2/3

序号 No	检测项目名称 Name of Test Items	标准要求或标准条款号 Standard requirement or The Clause Number of Standard	检测结果 Test Result		本项结论 Conclusion	备注 Remark
1	1.2米 跌落试验 1.2m Drop Test	联合国《关于危险货物运输的建议书 规章范本》 ST/SG/AC. 10/1/Rev. 21 3.3章 特殊规定 188条款 UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS" Model Regulations ST/SG/AC. 10/1/Rev. 21 3.3 special provisions 188	顶部 底部	包装件未破裂。电池未破损,无导致电池直接接触的移动,无内容物泄漏。 The package is not cracked. No damage to battery contained, No shifting of the contents to battery contact, No releasing of contents.	合格 Passed	/
			长短 侧面	包装件未破裂。电池未破损,无导致电池直接接触的移动,无内容物泄漏。 The package is not cracked. No damage to battery contained, No shifting of the contents to battery contact, No releasing of contents.		
			棱 角	包装件未破裂。电池未破损,无导致电池直接接触的移动,无内容物泄漏。 The package is not cracked. No damage to battery contained, No shifting of the contents to battery contact, No releasing of contents.		
检测环境条件 Test Environment Condition		环境温度:23℃;环境湿度:/% Ambient temperature:23℃, Ambient humidity:/%				
分包检测情况 Subcontracted Test Condition		检测项目 Test Item	/			
		分包实验室 Subcontracted Laboratory	名称 Name	/	邮编 Post Code	/
			地址 Address	/	电话 Tel	/




上海化工院检测有限公司
检测报告-附图

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report—Appendix

NO. 1121121019

3/3

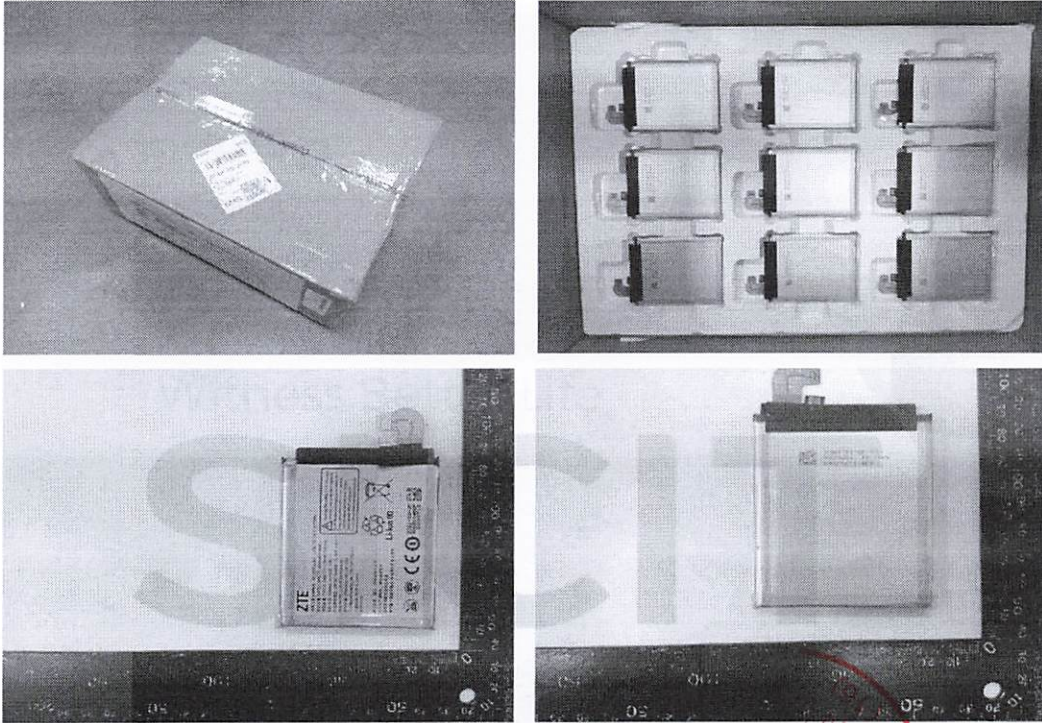

ZTE

锂离子聚合物电池 / RECHARGEABLE LI-ION POLYMER BATTERY

额定容量 / RATED CAPACITY: 4900mAh (19.06Wh)
典型容量 / TYPICAL CAPACITY: 5000mAh (19.45Wh)
标称电压 / NOMINAL VOLTAGE: 3.89V ==
充电限制电压 / LIMITED CHARGE VOLTAGE: 4.48V ==
型号 / MODEL: Li3949T44P8h806459
执行标准 / STANDARD: GB 31241-2014
中兴通讯股份有限公司 / ZTE CORPORATION
中国制造 / MADE IN CHINA
1ICP6/65/76

Warning: The battery is not removable
Removal may cause fire or explosion
Do not disassemble, impact, crush, heat or burn
Do not use batteries after severe swelling
Use only original batteries and chargers
Do not expose to high temperature
Do not use batteries after water immersion

报告结束